

Facestock

A clear film with print receptive coating. Produced from wood pulp sourced from managed plantations, the material is biodegradable and compostable.

Basis Weight 64 g/m² ISO 536

Caliper 45 µm ISO 534

Adhesive

S9500 is an acrylic based biodegradable and compostable adhesive.

Liner

Supercalandered glassine paper, white, increased release level.

Basis Weight 60 g/m² ISO 536

Caliper 53 µm ISO 534

Laminate

Total Caliper 119 µm±10% ISO 534

Performance data

Initial Tack 12.5 N/25mm FTM 9 Glass

Peel Adhesion 90° 7 N/25mm FTM 2 St.St.

Min. Application Temp. 5 °C

Service temperature -20°C to 80°C

Adhesive Performance

The adhesive is characterized by a good initial tack and good adhesion on a wide variety of substrates.

Applications and use

Natureflex is certified biodegradable according to the European Standard EN13432. It can be used for all kinds of applications, but is specifically suited for applications where the complete packaging should be biodegradable and where direct food contact is required. The NatureFlex film also has a good resistant to oils and grease.

Because of its nature (cellulose based) care should taken in wet conditions for long terms applications, preliminary tests are therefore recommended prior to use.

It is recommended the storage in its original wrapping away from any source of local heating or direct sunlight.

S9500 is ideal be used for all kinds of applications, but is specifically suited for those kinds of applications where the complete packaging should be biodegradable and where indirect or direct food contact with dry foodstuff is required (ie. fruits & vegetables labeling).

For direct and indirect adhesive coating applications. Particularly suitable as a release paper for die-cutting self adhesive labels.


Conversion & printing

The product offers very good die-cutting properties. NatureFlex™ can be converted by flexographic and rotogravure printing processes. Nitrocellulose-based inks and water based inks are suitable. For applications on biodegradable packaging, the use of biodegradable inks is recommended. Please consult your printing ink supplier about suitable printing inks.

Because of the heat sensitivity of the face stock the drying temperature needs to be reduced to the lowest possible temperature. Opposed to this, the air flow to dry the inks needs to be increased.

AO293

Fasson® NATUREFLEX CLEAR - S9500- BG40WH HR

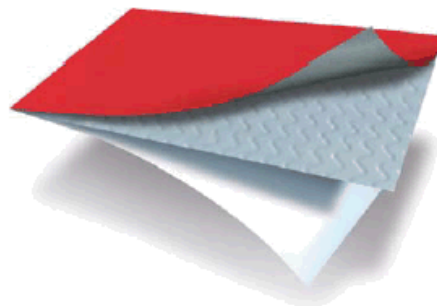

NATUREFLEX CLEAR

S9500

BG40WH HR

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

This backing will give high release values and is recommended for manual dispensing.

Special Approvals

S9500 is compliant with the European food regulation 1935/2004/EC for direct food contact with dry, non-fatty foodstuff.

S9500 complies with DIN EN 13432 biodegradability and compostability regulation and is OK compost certified under the tracking number S259.

Shelf life

Half a year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.