

Facestock

A white, one side machine coated, woodfree printing paper with semi-gloss appearance. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	80 g/m ²	ISO 536
Caliper	69 µm	ISO 534

Adhesive

S9500 is an acrylic based permanent biodegradable and compostable adhesive.

Liner

BG40 white, a supercalendered glassine paper.

Basis Weight	60 g/m ²	ISO 536
Caliper	53 µm	ISO 534

Laminate

Total Caliper	136 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	12.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	7 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

Adhesive Performance

The adhesive is characterized by a good initial tack and good adhesion on a wide variety of substrates.

Applications and use

The products are suitable for a wide range of promotional and industrial label applications where attractive semi-gloss appearance in multi-colour work is required.

S9500 is ideal be used for all kinds of applications, but is specifically suited for those kinds of applications where the complete packaging should be biodegradable and where indirect or direct food contact with dry foodstuff is required (ie. fruits & vegetables labeling).

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Conversion & printing

Facestock is suitable for solid and halftone images and text printing by letterpress, flexo (UV and waterbased) offset and screen processes. Hot and cold foil stamping, varnishing and variable imprinting with thermal transfer are also suitable for this product.

Special Approvals

S9500 is compliant with the European food regulation 1935/2004/EC for direct food contact with dry, non-fatty foodstuff.

S9500 complies with DIN EN 13432 biodegradability and compostability regulation and is OK compost certified under the tracking number S0259.


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AM234

Fasson ®

MC PRIMECOAT FSC - S9500- BG40WH FSC

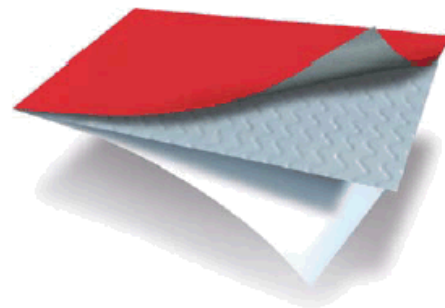

MC PRIMECOAT FSC	
------------------	--------------------------------------------------------------------------------------

S9500	
-------	---------------------------------------------------------------------------------------

BG40WH FSC	
------------	---------------------------------------------------------------------------------------

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.